

Installation Information

Radio Interface for 15-Pin Accessory Connector on RF Deck

RX Audio from 15-Pin connector Pin 13

Radio must be set to "Unmute" mode and valid CTCSS Tone must be added to programming set-up


Pin 4 AUX_GPI2 comes factory Default with LK2M fitted and set to Active High (Ignition Sense)

Pin 12 AUX_GPI1 Program to PTT Active Low

Pin 13 AUD_TAP_OUT Program to RX Audio Chain

OTHER NOTES: ZB pulls Rx audio from 15-pin connector. ZA pulls Rx audio from external speaker.



RCB-xxZB Cable

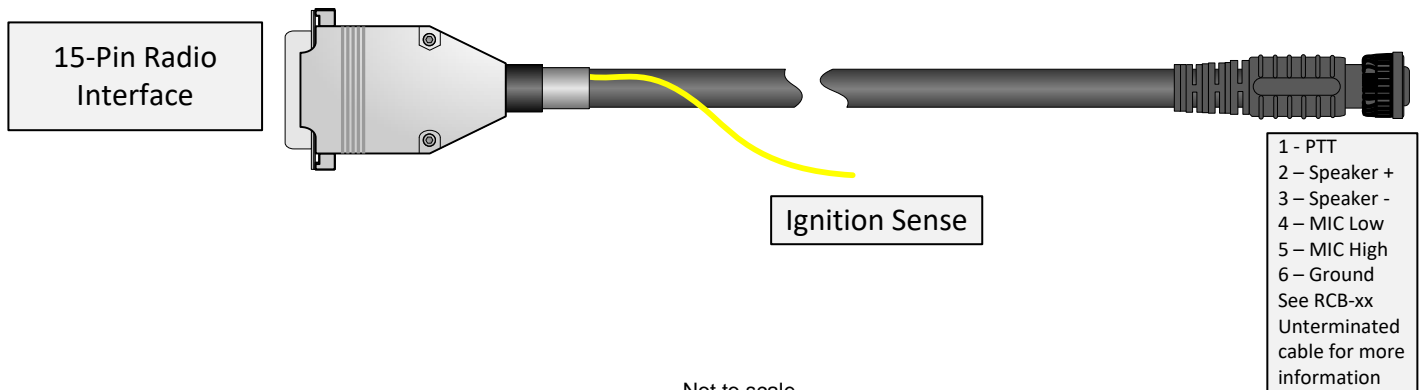

Rear View

TM8000

Power and External Speaker
connector

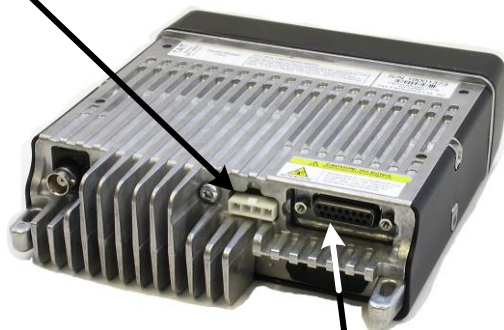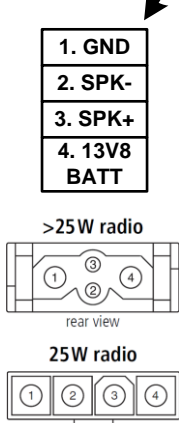

Radio Interface

15-Pin Radio Interface

